

REVISION	DATE	PORTER No.
CUSTOMER No.	DATE	

© COPYRIGHT 2008
PORTER ATHLETIC, INC.
ALL RIGHTS RESERVED

12-1-2008

441 1 1

YOUTH SOCCER GOALS
IN-GROUND / SLEEVE-TYPE

PORTER
WORLD LEADER
IN QUALITY SPORTS EQUIPMENT

2500 S. 25th AVENUE
BROADVIEW, ILLINOIS 60155
www.porterathletic.com



DRAWING BY
RJM

CHECKED BY
JPW

PAGE No.
R-441-1

PARTS LIST (For PAIR of Goals)						
No.	441 4061 QTY.	441 4091 QTY.	441 6121 QTY.	441 6181 QTY.	441 7211 QTY.	DESCRIPTION
1	2	2	2	2	2	FRME 441 01 072 3 CROSSBAR: 6'-0" Wide Goals
						FRME 441 01 108 3 CROSSBAR: 9'-0" Wide Goals
						FRME 441 01 144 3 CROSSBAR: 12'-0" Wide Goals
						FRME 441 01 222 3 CROSSBAR: 18'-6" Wide Goals
						FRME 441 01 252 3 CROSSBAR: 21'-0" Wide Goals
2	4	4	4	4	4	FRME 441 02 062 3 POST: 4'-0" High Goals
						FRME 441 02 068 3 POST: 4'-6" High Goals
						FRME 441 02 092 3 POST: 6'-6" High Goals
						FRME 441 02 098 3 POST: 7'-0" High Goals
3	4	4	4	4	4	HDWE 09017 0E0 3/8" x 1/2" Lg. SET SCREW
4	4	4	4	4	4	PCAP 00067 002 INSIDE CAP PLUG
5	30	36	62	62	72	ELEC 00218 002 CABLE TIE (Not Shown): For Securing Net To Goal

GOAL No.	A Height	B Width	Net No.	C Depth
4414061	4'	6'	4904063	3'-6"
4414091	4'-6"	9'	4904093	3'-6"
4416121	6'-6"	12'	4906125	5'
4416181	6'-6"	18'-6"	4906185	5'
4417211	7'	21'	4907215	5'

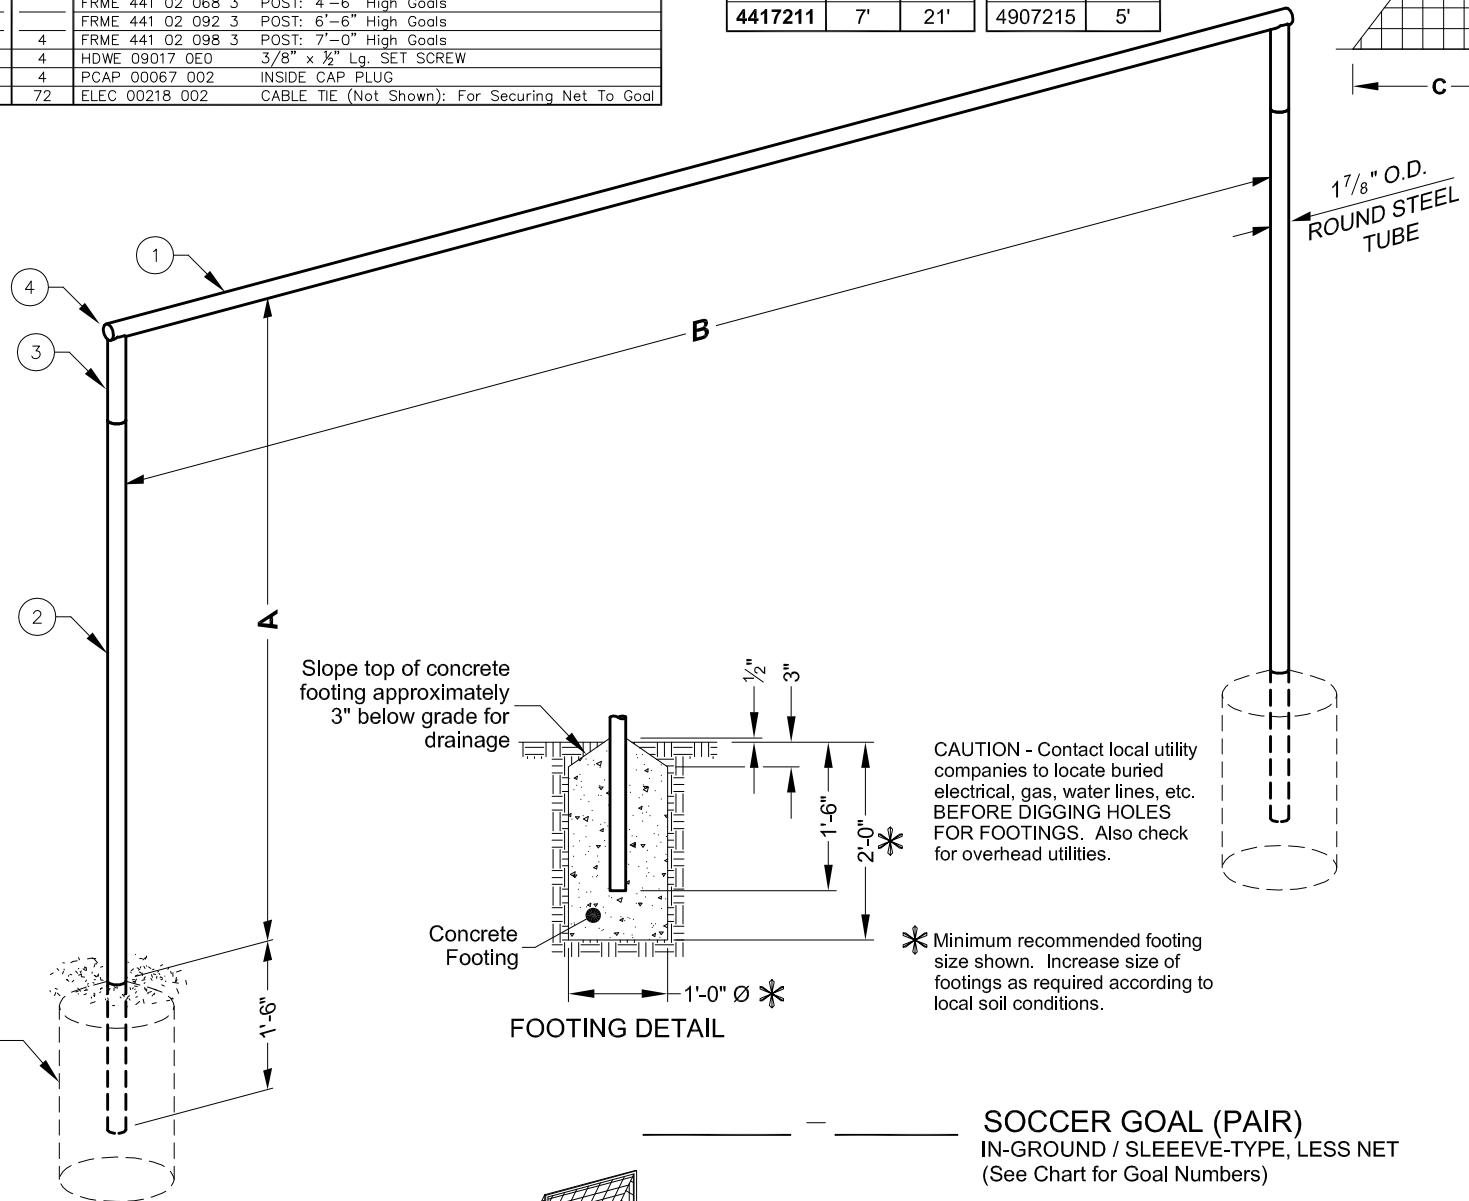

CAUTION - Contact local utility companies to locate buried electrical, gas, water lines, etc. BEFORE DIGGING HOLES FOR FOOTINGS. Also check for overhead utilities.

* Minimum recommended footing size shown. Increase size of footings as required according to local soil conditions.

Concrete footing for permanent installation shown. Specify optional No. 401000 Outdoor Ground Sleeve if removal of goal is required.

OPTIONAL ACCESSORIES

- No. 401000 OUTDOOR GROUND SLEEVE
- No. 00418080 SOCCER NET TIE-DOWN STAKES

PAGE No.

- R-401
- R-418

SOCCER GOAL (PAIR)
IN-GROUND / SLEEVE-TYPE, LESS NET
(See Chart for Goal Numbers)

SOCCER NET (PAIR)
(See Chart for Net Numbers)

SEE PAGE No. R-490 FOR SOCCER NET INFORMATION

SPECIFICATIONS

PORTER No. 441xxx1 YOUTH SOCCER GOALS LESS NET IN-GROUND / SLEEVE-TYPE (ONE PAIR)

Inside measurements of goal opening shall be as shown in chart below (A and B):

GOAL No.	A INSIDE HEIGHT	B INSIDE WIDTH	Net No.	C Depth With Net
4414061	4'	6'	4904063	3'-6"
4414091	4'-6"	9'	4904093	3'-6"
4416121	6'-6"	12'	4906125	5'
4416181	6'-6"	18'-6"	4906185	5'
4417211	7'	21'	4907215	5'

Goal crossbar and posts shall be of round steel tubing, 1-7/8" in diameter. Crossbar shall sleeve over posts, and be secured with set screws for ease of assembly or compact disassembly for seasonal storage. Crossbar and posts shall be provided in a durable, official white powder-coated finish.

Posts shall extend 1'-6" into concrete footings. Use with optional No. 401000 ground sleeves when removal of goals is required.

- See Page No. R-490 for specifications on No. 490xxxx Soccer Net (Pair).

OPTIONAL ITEMS TO SPECIFY

- See Page No. R-401 for specifications on Porter No. 401000 Outdoor Ground Sleeve (Each) when removal of goals is required.
- See Page No. R-418 for specifications on Porter No. 00418080 Soccer Net Tie-Down Stakes (Set of Eight).